















680 ÷ 1800 mm



80 kg

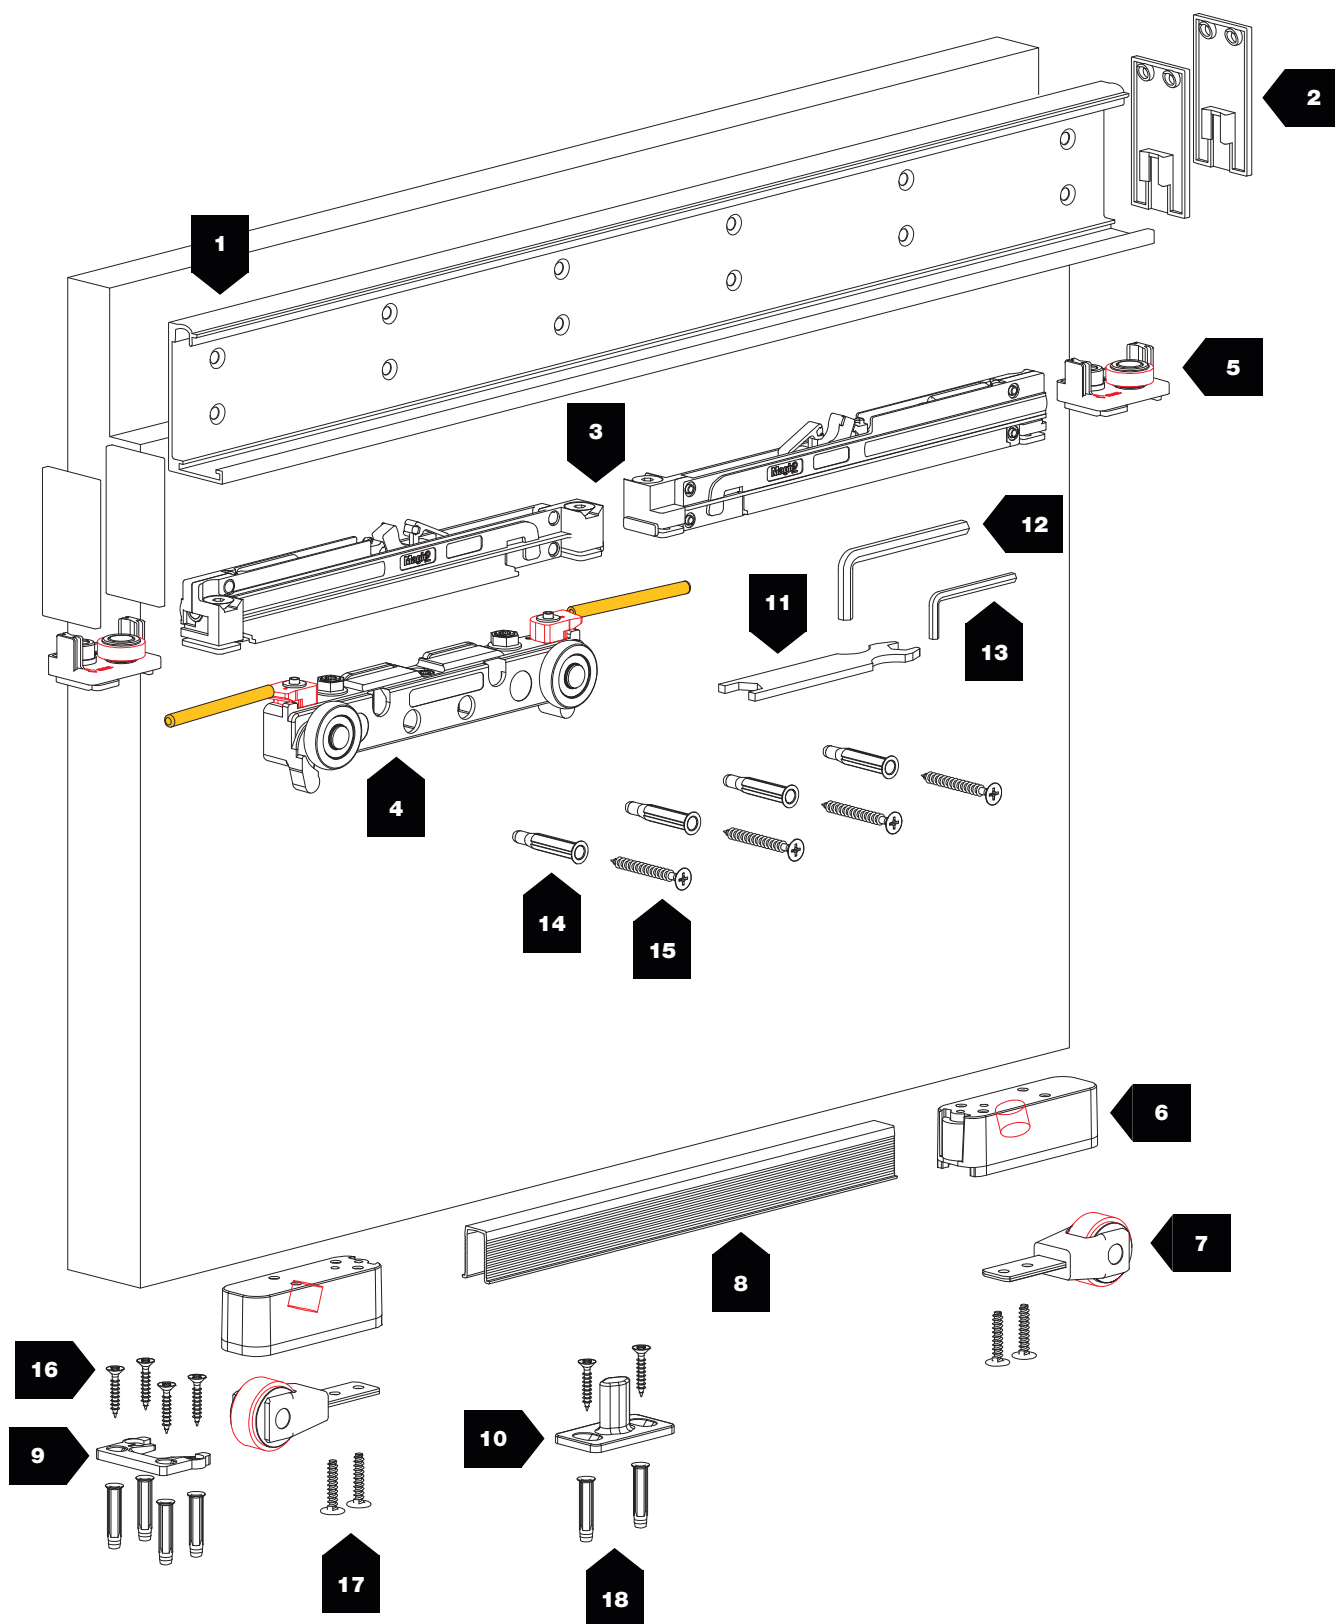

10 mm

N°			KG		N°			KG	
1	2850		—		10	2855		—	
2	2851/N		—		11	1025		—	
	2851/A								
3	2864-80		80	PATENTED	12	538		—	
4	2852		80	PATENTED	13	654		—	
5	2856		—	PATENTED	14	FISCHER UX6		—	
6	2858		80	PATENTED	15	4,5x40		—	
7	2857		80	PATENTED	16	4x30		—	
8	121		—		17	4x20		—	
9	2859		—		18	FISCHER SX5		—	



80 kg



N.2 Soft damper stoppers
N.2 Fermi ammortizzati




Customizable door width
Larghezza porta personalizzabile



Patented system
Sistema brevettato




Standard Finish
Finitura Standard

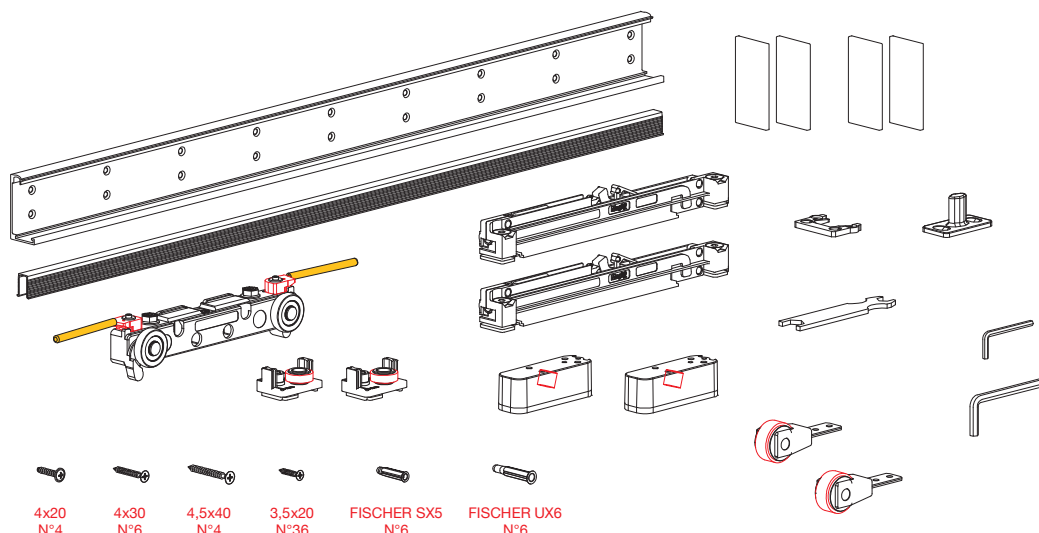

OLD CODE	NEW CODE		
MAGIC2/1100	K.0031.1.01	1100 mm	6x *
MAGIC2/1800	K.0031.2.01	1800 mm	4x


* For export - Min.12x

MEASUREMENTS DESCRIPTION / DESCRIZIONE MISURE


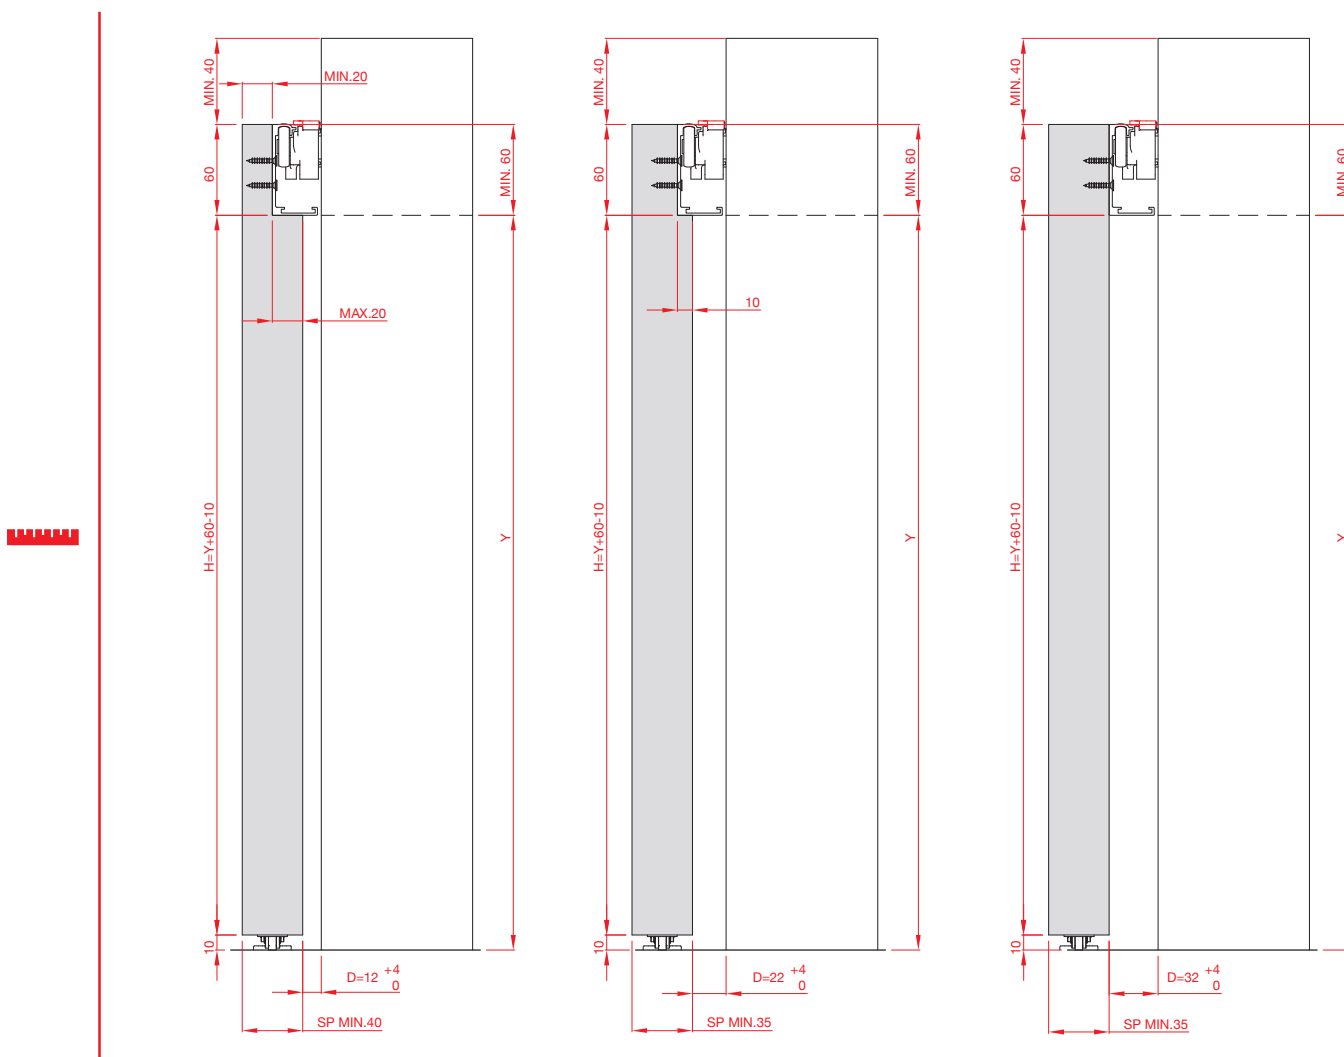




HIDDEN MILLED / FRESATA CIECA

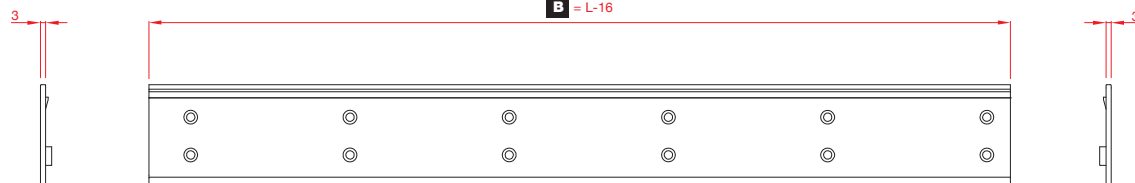

ART. 2851

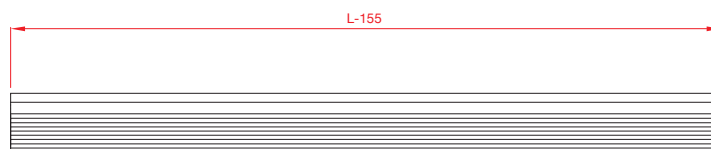


ART. 2858


ACCESSORIES PLACEMENT (STANDARD POSITION) / POSIZIONAMENTO DEGLI ACCESSORI (POSIZIONE STANDARD)



LEFT OPENING / APERTURA VERSO SINISTRA

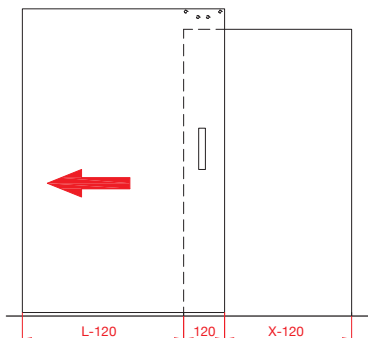


RIGHT OPENING / APERTURA VERSO DESTRA

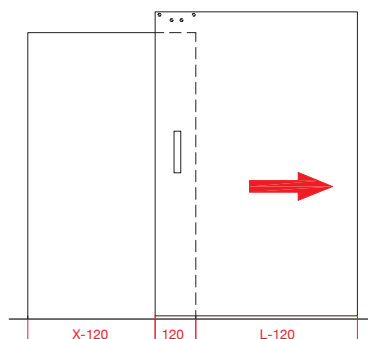

B=0mm (Min.)

B=50mm (Suggested/Suggerito)

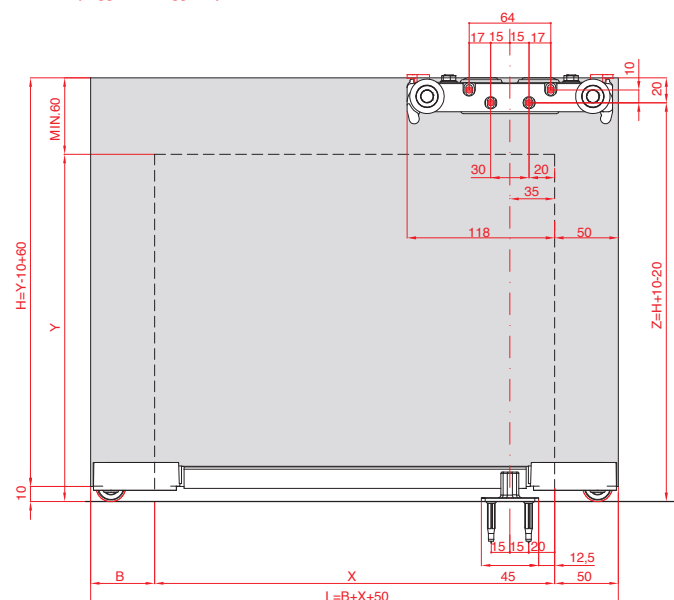

MAGIC2/1100 (K.0031.1.01)

B=0

X= MIN. 800 (L=850)

X= MAX. 1050 (L=1100)

B=50

X= MIN. 800 (L=900)

X= MAX. 1000 (L=1100)

MAGIC2/1800 (K.0031.2.01)

B=0

X= MIN. 800 (L=850)

X= MAX. 1750 (L=1800)

B=50


X= MIN. 800 (L=900)

X= MAX. 1700 (L=1800)


ACCESSORIES PLACEMENT (INTERMEDIATE POSITION) / POSIZIONAMENTO DEGLI ACCESSORI (POSIZIONE INTERMEDIA)



LEFT OPENING / APERTURA VERSO SINISTRA

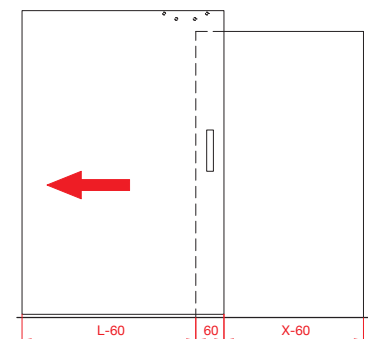


RIGHT OPENING / APERTURA VERSO DESTRA

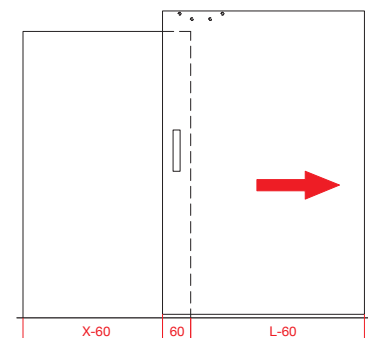

B=0mm (Min.)

B=50mm (Suggested/Suggerito)

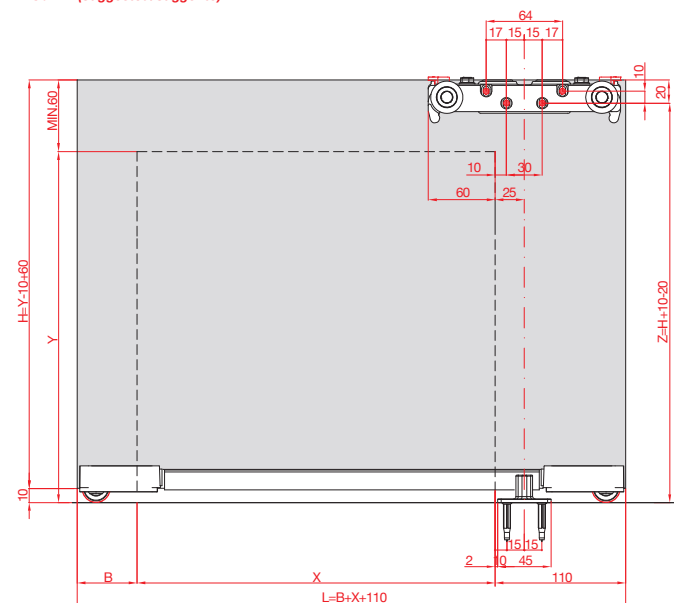

MAGIC2/1100 (K.0031.1.01)

B=0

X= MIN. 740 (L=850)

X= MAX. 990 (L=1100)

B=50

X= MIN. 740 (L=900)

X= MAX. 940 (L=1100)

MAGIC2/1800 (K.0031.2.01)

B=0

X= MIN. 740 (L=850)

X= MAX. 1690 (L=1800)

B=50


X= MIN. 740 (L=900)

X= MAX. 1640 (L=1800)


ACCESSORIES PLACEMENT (TOTAL OPENING POSITION) / POSIZIONAMENTO DEGLI ACCESSORI (POSIZIONE APERTURA TOTALE)




LEFT OPENING / APERTURA VERSO SINISTRA

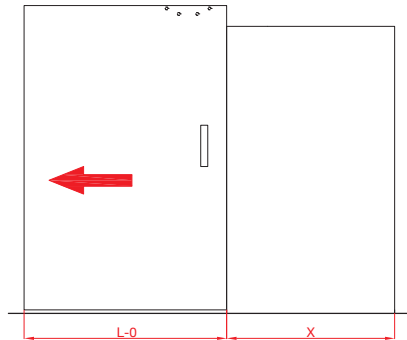

RIGHT OPENING / APERTURA VERSO DESTRA

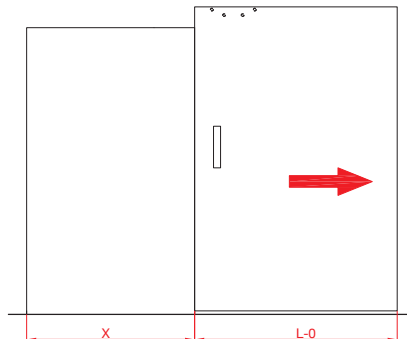

B=0 mm (Min.)
B=50 mm (Suggested/Suggerito)

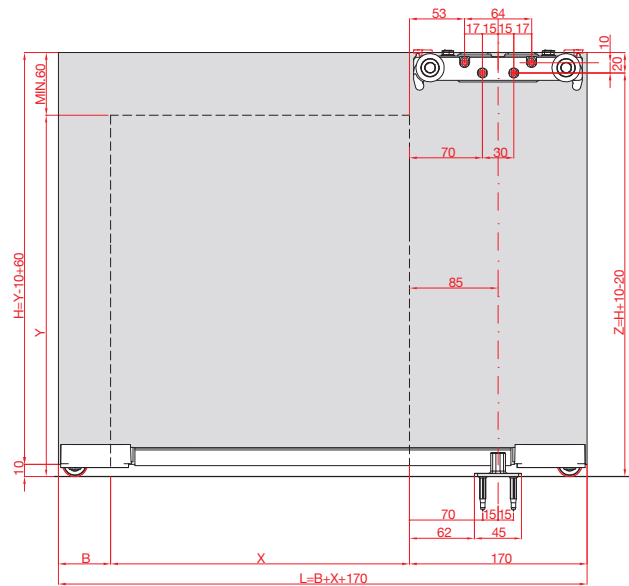

MAGIC2/1100 (K.0031.1.01)

B=0
X= MIN. 680 (L=850)
X= MAX. 930 (L=1100)




B=50
X= MIN. 680 (L=900)
X= MAX. 880 (L=1100)

MAGIC2/1800 (K.0031.2.01)



B=0
X= MIN. 680 (L=850)
X= MAX. 1630 (L=1800)

B=50
X= MIN. 680 (L=900)
X= MAX. 1580 (L=1800)

ART. 2859 - END STOPPER / FINE CORSA

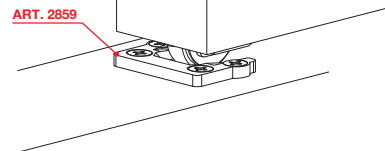

**ALUMINIUM TRACK FOR IRREGULAR FLOOR
PROFILO IN ALLUMINIO PER PAVIMENTAZIONE IRREGOLARE**



ALUMINIUM PROFILE
PROFILO IN ALLUMINIO

ART. 341

ADHESIVE / ADESIVO

8010.00341